


2006-08-06_Programming_11x11

B.B. Huria

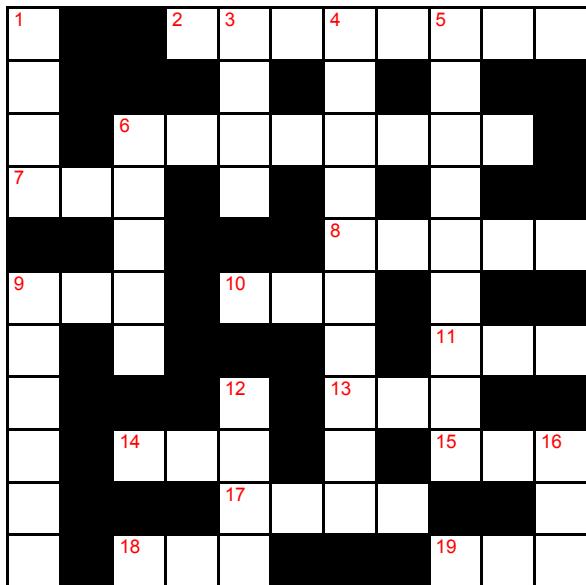

Across

- 2** Action performed by any structure. (8)
- 6** "P" in "IPL" stands for _____. (8)
- 7** Technique that allows a computer to address a HD larger than 528 MB. (3)
- 8** BER stands for Bit XXXXX Rate. (5)
- 9** Interconnection system between a microprocessor and attached devices. (3)
- 10** Hash function for checksum. (3)
- 11** Name of a signal that data has been received successfully. (3)
- 13** Inter-IC bus, a de-

facto solution for embedded applications. (3)

14 A sub-layer of OSI concerned with managing traffic. (3)

15 A generic term applied to coding schemes that allow for the correction of errors in one or more bits of a word of data. (3)

17 Make synchronous. (4)

18 Info exchange via PCs. (3)

19 A self-maintaining routing protocol for wireless networks. (3)

Down

- 1** A language most frequently used for writing CGI scripts. (4)
- 3** "U" in "ACU" stands for _____. (4)
- 4** First "C" in "ECC" stands for _____. (10)
- 5** "I" in "DDI" stands for _____. (9)
- 6** The state where an unrecoverable error has occurred. (5)
- 9** A character name that uniquely identifies a driver's routines to the kernel. (6)
- 12** Pronounced as "scuzzy". It refers to the small computer system

interface that allows peripherals to communicate with a computer's operating system. (4)

16 Memory locations providing communication between the device and the driver. (3)